

MICRO-ZMAX

Multi Stream Advanced
Electronic Volume Corrector

KEY FEATURES

- Approved for legal metrology. EN 12405 and MID compliant
- Software compliant to Welmec 7.2
- Certified for use in hazardous locations
- 3 streams. PTZ correction, energy and mass in 2 streams
- AGA 8, NX19, GERG, ISO 6976 and mass calculations
- AGA 5 energy calculations
- Suitable for LF and HF type meters
- AGA 7 HF turbine meter correction
- Direct NAMUR sensor interface with built-in sensor power
- Smart pressure transmitter support
- Built-in DC output for powering analog and smart sensors
- External DC power input
- Up to 4 simultaneous TCP connections via GPRS interface
- Configurable cryout function via GPRS channels or SMS
- Accepts incoming data calls originated by remote systems via GSM
- Remote monitoring, configuration, and diagnostics
- Remote firmware update
- Per stream hourly, daily, monthly archive, min/max/average data
- Flexible, user-configurable data logging feature
- Alarm and event logging
- Modbus RTU/TCP support with configurable addressing
- Modbus master protocol support
- Built-in RS-232, RS-485 and optical interfaces
- Pluggable RS-232, RS-485 interface options for additional needs
- RTU features with analog and digital inputs, digital outputs
- Ultra low power consumption. 10 years typ. 5 years min. battery life
- Separate battery for GPRS/GSM interface
- Graphic LCD with LED backlight
- RTC with synchronization and daylight saving support
- Maintenance free, durable design
- IP66 rugged, stainless housing
- Push-in terminals for easy field wiring
- Easy to use configuration and programming software

MICRO-ZMAX is an advanced, high accuracy, multi stream volume corrector specially designed to meet the emerging requirements of gas distribution utilities.

It defines a new standard for ease of use while delivering unmatched performance and flexibility.

MICRO-ZMAX incorporates wide range of features which not only meets the local metering requirements, but also provides a complete solution for gas distribution utilities to achieve fast, efficient and cost effective network operation and management.

Approved for Legal Metrology

MICRO-ZMAX has been approved by NMI Netherlands for legal gas metering as per the EN 12405 standard. This involves a complete set of stringent test procedures to verify that the product performs its functions and maintains performance under severe environmental conditions.

Instrument software is also compliant to Welmec 7.2 of the MID 2014/32/EU/2015 and includes extensions L, S, T, D and I-2.



Self-Contained for Hazardous Locations

MICRO-ZMAX supports completely self-contained operation in hazardous locations.

Certified DC outputs, both for powering external analog or smart type transmitters and NAMUR sensors, eliminate the need for costly external intrinsically safe power supplies and zener barriers.

User-configurable HF input allows direct connection of NAMUR sensors, further eliminating the need for external certified converters.

Broad Range of Calculations

Calculations include volume, density, heating value, compressibility, energy and mass as per the AGA 8, NX19, GERG, ISO 6976, and AGA 5 standards.

Extensive Remote Communication Features

MICRO-ZMAX offers comprehensive features for modern, Internet based remote access via GPRS networks. All configuration, reporting, monitoring and diagnostics facilities are also available remotely via designated communication channels, to form a modern supervisory distribution management system which requires very low number of visits to remote stations and fewer personnel for network operations and maintenance.


MICRO-ZMAX supports multiple, simultaneous TCP connections. This means number of host systems in different locations may access a remote instrument without influencing each other. This allows concurrent operation of multiple remote monitoring systems in different nature, such as utility SCADA systems, distribution management systems, and other legal monitoring systems belonging to upper level government organizations.

MICRO-ZMAX is also able to maintain most of its remote communications features even in battery mode. This gives a great advantage when remote sites are difficult to reach and mains power is unavailable, and also eliminates the need for costly solar power systems. It can perform periodic reporting at scheduled times of day via the GPRS interface, exchange data with remote center, transfer runtime and archive information, and execute scheduled tasks.

The internal GPRS/GSM interface, when operating in GSM mode, also accepts incoming data calls originated by authorized remote systems. It also allows any instrument alarm(s) be associated with number of SMS recipients, to send text messages upon alarm occurrences.

MICRO-ZMAX

Multi Stream Advanced
Electronic Volume Corrector

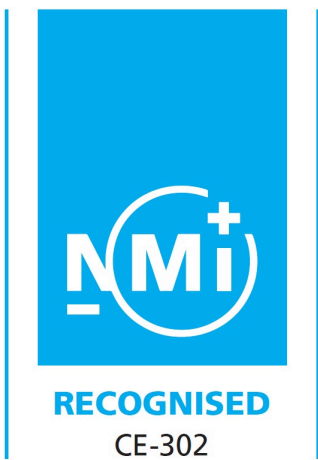

BASIC SPECIFICATIONS

POWER

Primary (EVCD) battery	3.6V certified battery. 10 years typ. 5 years min., under the specified operating conditions.
GPRS/GSM battery	3.6V certified battery, 5 years min., under the specified operating conditions.
External DC input	3.9...4.2V / 0.75A max.

GENERAL

Ambient temperature	-30°C...+70°C operating, -25°C...+70°C classification accord. to MID 2014/32/EC
Relative humidity	95% non-condensing
Dimensions	180H x 240W x 70D mm
Weight	1.3 kg
Housing	IP66 polycarbonate
Display	120 x 240 graphics LCD with backlight
Keyboard	6 front panel keys
Mechanical environment class	M2
Electromagnetic environment class	E2

CERTIFICATES AND APPROVALS

Measurements and calculations	NMI EN12405-A2, MID 2014/32/EU (T11476/T11509/TC10745)
Safety	KIWA ATEX II 1 G Ex ia [ia IIC] IIB T3 Ga (KIWA 15ATEX0049X)
CE	IEC 61000-4-2 (ESD), IEC 61000-4-3 (EM), IEC 61000-4-4 (EFT), IEC 61000-4-5 (Surge), IEC 61000-4-6 (Conducted), IEC 61000-6-4 (Emission)

COMMUNICATIONS

Pluggable GPRS option board (P3)	QUAD band GPRS/GSM, dial-in feature, SMS, TCP/IP client or server (up to 4 concurrent TCP connections)
Antenna	2.4 dBi internal antenna standard. External antenna optional.
SIM card holder	Internal micro SIM
On-board RS-232 (P1)	Full duplex, 150...115200 bps, 7...9 bits, 1/1.5/2 stop bits, none/odd/even parity
On-board RS-485 (P2)	Half duplex, 1/8 load, fail-safe, 150...115200 bps, 7...9 bits, 1/1.5/2 stop bits, none/odd/even parity
RS-232 option board (P3)	Full duplex, 150...115200 bps, 7...9 bits, 1/1.5/2 stop bits, none/odd/even parity
RS-485 option board (P3)	Half duplex, 1/8 load, fail-safe, 150...115200 bps, 7...9 bits, 1/1.5/2 stop bits, none/odd/even parity
Optical (P4)	Full duplex, 9600 bps, 8 bits, 1 stop bit, no parity (native protocol only)
Protocols	Auto detect Native, Modbus RTU/TCP Slave, Modbus RTU Master, Smart Sensor (P2 only)

METROLOGY

Pressure inputs	
Analog	PT1, PT2, AI1, AI2, and AI3 inputs for 0/4...20mA external transmitters, reading accuracy $\leq 0.005\%$ FS
Smart	Industrial RS-485 (P2) interface for Type LD20 (TC11267) sensor(s)
Transmitter power	12.6V / 0.15A max.
Temperature sensor inputs	RTD1, RTD2 inputs, 2 wire Pt1000 sensors, 5th order polynomial linearization, reading accuracy $\leq 0.01^\circ\text{C}$
Temperature transmitter inputs	AI1, AI2, and AI3 inputs for 0/4...20mA external transmitters, reading accuracy $\leq 0.005\%$ FS
LF/HF input (stream-1)	
LF mode	Dry reed contact, closed $\leq 10\text{k}\Omega$, open $\geq 500\text{k}\Omega$, 4Hz max., 0.2 sec min. on/off time, 5m cable max.
HF mode	DIN 19234 NAMUR or 0-10V pulse, 5kHz max. integral $1\text{k}\Omega$ termination resistor, closed $< 1.2\text{mA}$, open $> 2.2\text{mA}$
NAMUR sensor power	9.5V / 54mA max., 5m cable max.
LF inputs (stream-2, aux stream)	DI1 and DI2 inputs for dry contacts, closed $\leq 10\text{k}\Omega$, open $\geq 500\text{k}\Omega$, 4Hz max., 0.2 sec on/off time min., 5m cable max.
Input scan rate	$\geq \text{EN12405-1 Par. 6.1.4}$
Smart pressure transmitter	Type LD20 (TC11267) smart, industrial RS-485 interface, 3/10/16/30 bara, accuracy $\leq 0.15\%$ FS, 5m cable max.
Analog pressure transmitter	0...1/2/5/10/20/50/100 bara, 0.25% standard, 0.1% optional, -40°C ... $+100^\circ\text{C}$, 5m cable max.
Temperature sensor	2 wire Pt1000, DIN EN 60751, class A standard, 5m cable max.

ANALOG INPUTS

Channels	PT1, PT2, AI1-AI3, 0/4...20mA, reading accuracy $\leq 0.005\%$ FS
----------	---

DIGITAL INPUTS

Channels	DI1-DI8, dry reed contacts, closed $\leq 10\text{k}\Omega$, open $\geq 500\text{k}\Omega$, 50ms debounce filter, 0...60s digital filter
----------	---

DIGITAL OUTPUTS

Channels	DO1-DO4, open collector, 30V/0.15A max., 10Hz pulse rate max., 50ms on time min.
----------	--